
YORK RAKE Model RS



A compact, yet man-sized rake unit for 10 to 20 horsepower 3-point hitch tractors.

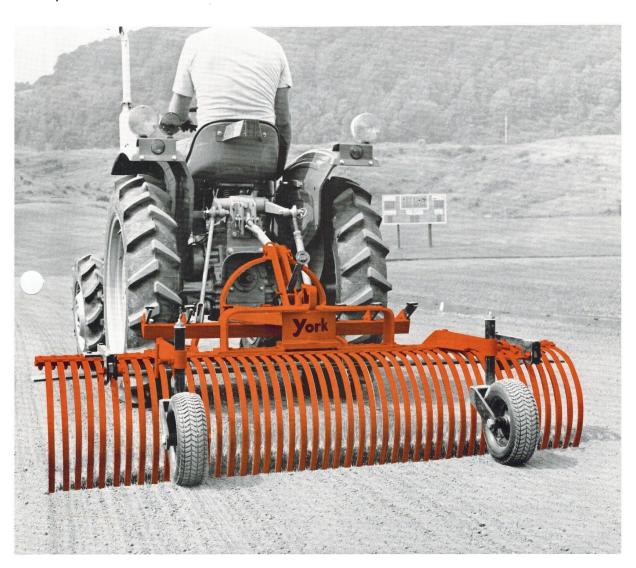

Complete more projects in less time with the York Rake Unit... specifically engineered for use with category "O" or "1" 3-point hitch tractors. A compact yet man-sized tractor-Rake combination.

The versatile York Rake Unit, Model RS, combines scarifying, blading, raking ... removes stones

and debris ... spreads topsoil ... also pulverizes and mulches

The Model RS Rake is designed for use by landscape and seeding contractors, nurseries, park maintenance departments, estates, golf courses, cemeteries, beaches, schools, resorts, recreational areas.



"There's a York Rake to match your H.P."

YORK RAKE MODEL	H.P.	TRACTOR
TA 1 Trailer Type	Under 10	
TA 2 Trailer Type	10 to 20	
RS 3-point hitch Category "0" or "1"	10 to 20	

Selecting the proper YORK RAKE to match your tractor horsepower is important for getting maximum use out of your Rake.

5' Rake

5'

6' Rake

6

A versatile landscaping work-horse in addition to superior rake-ability, the Model RS is equipped with three major optional attachments, to handle a wide variety of soil-working jobs. Adjustable Caster Wheels to provide precise control of working depth of rake teeth; a Scarifier to rip up the hardest-packed earth; and a rugged steel Grader Blade to match the rake. Both Scarifier and Blade flip up and lock in carrying position when not in use. With the complete Rake Unit you get multi-job capability in performing a broad range of soil-preparation, landscaping and grounds maintenance functions including:

- Spreading topsoil; distributing crushed stone, gravel and cinders
- · Ditching and terracing
- · Removing twigs, stones, debris
- · Breaking up hard-packed earth
- · Pulverizing and mulching
- · Grading and leveling
- · Preparing large areas for seeding

APPLICATIONS EVERYWHERE

The combination of the York Rake Unit Model RS and a mid-range grounds maintenance tractor is ideally suited for use by park maintenance departments, recreation areas, resorts, beaches, golf courses, cemeteries, schools and hospitals, commercial and industrial buildings, apartment complexes, housing developments, seeding and land-scape contractors, nurseries, estates, and homeowners with extensive grounds to maintain.


SPECIFICATIONS · YORK RAKE MODEL RS

FRAME:

Maximum Working Width

Grader Blade

Minimum Working Width	3' 7"	4' 5"
Number of Rake Positions	5	5
Tractor Hitch Required Sta	ndard Cat. "O" or "1"	3-point hitch
RAKE ASSEMBLY: Number of Rake Teeth	30	36
Size of Rake Teeth Rake Tooth Material	1/4" x 1" x 22" Heat Treated	1/4" x 1" x 22" Heat Treated
Fasteners	Alloy Steel Heat Treated Cap Screws	Alloy Steel Heat Treated Cap Screws
Distance Between Teeth	3/4"	3/4"
OPTIONAL EQUIPMENT CASTER WHEELS:		
Caster Wheel Size Caster Wheel Weight (per pair)	10 x 3.50 47 lbs.	10 x 3.50 47 lbs.
FLIP UP BLADE:		4/4" 0" 70"
Size Weight	1/4" x 6" x 60" 42 lbs.	1/4" x 6" x 72" 47 lbs.
SCARIFIER:	42 105.	
Width	40"	40"
Weight	43 lbs.	43 lbs.
Number of Teeth	8	8
Scarifier Tooth Material WEIGHT:	Alloy Steel	Alloy Steel
Rake and Frame	170 lbs.	189 lbs.
Rake, Frame, Caster	, , 0 .50.	
Wheels, Scarifier and		1

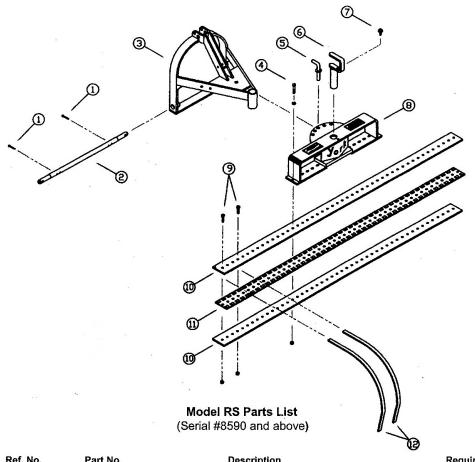


Ref. No.	Part No.	Description	Required
1	PP4244	Cotter Pin (3/16" x 1-1/2")	(2)
2	00301210	Drawbar Cat, 1	
N/S	00302010	Drawbar Cat. 0	
3	00330300	Frame Only	
1-3	00330900	RS Frame	
4	PG3540	Capscrew (3/8" x 2-1/4" NC); S/L Nut; F/W	(10)
5	00305100	Angle Locking Pin	
6	00304100	Center Pin	
7 .	PP3180	Serrated Bolt (3/8" x 3/4")	
8	00371500	Saddlebar	
9 10	PF3538	Capscrew (3/8" x 1-3/4" NC); S/L Nut	(20-5') (26-6')
10	00274020	Rake Head 6'	(2)
11	03275010	Rake Tooth Spacer Plate 6'	
12	02170110	Rake Tooth (.25 x 1.00 x 22.00)	(30-5') (36-6')
4-12	00373900	RS 6' Rake	
N/S	00273020	Rake Head 5'	
N/S	03274010	Rake Tooth Spacer Plate 5'	
N/S	00372900	RS 5' Rake	

Form RSP1B


All specifications subject to change without notice.

10/30/03

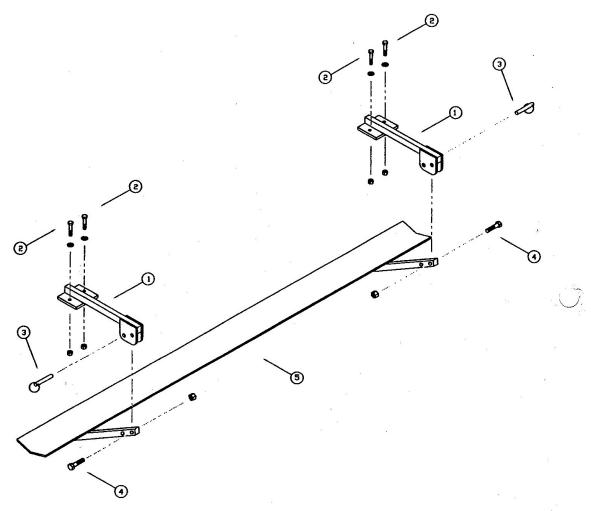

Model RS Grader Blade Parts List (Serial #8590 and above)

Ref. No.	Part No.	Description	Required	
1	02381080	Upper Blade Bracket	(2)	
2	PF3539	Capscrew (3/8" x 2" NC); S/L Nut; FW	(4)	
3	PP5347	Cotterless Hitch Pin (1/2" x 3")	(2)	
4	PP3554	Capscrew (1/2" x 2" NC); S/L Nut	(2)	
5	02385390	Blade w/Lower Brackets; 6'	` '	
N/S	02384390	Blade w/Lower Brackets; 5'		
Form RSP2A		All specifications subject to change without notice.	10/30/03	

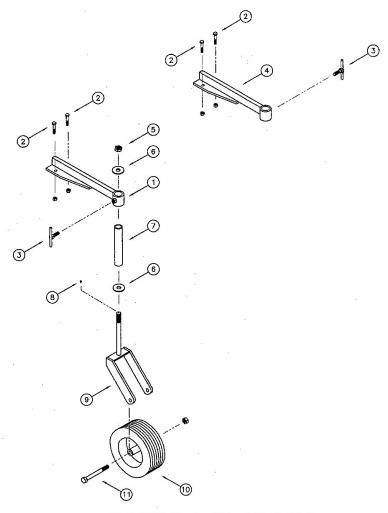

Model RS Caster Wheel Parts List (Serial #8590 and above)

Ref. No.	Part No.	Description	Required
1	00393710	Rake Head Bracket (Left)	
2	PF3539	Capscrew (3/8" x 2" NC); S/L Nut	(4)
3	05590300	T-Lock Screw	(2)
1-3	00393810	RS C/W Bracket (Left)	. ,
4	00393700	Rake Head Bracket (Right)	
2-4	00393800	RS C/W Bracket (Right)	
5	PP5765	S/L Jam Nut (3/4")	(2)
6	PP8648	3/4 " SAE Flat Washer	(4)
7	00392140	Swivel Housing	(2)
8	PP4615	Grease Fitting (1/4")	(2)
9	00392100	Fork Only	(2)
5-9	00392200	Complete Fork Assembly (Less Axle)	(2)
10	PP9038	Wheel w/Tire & Bearings Complete	(2)
11	PH3586	Axle; Capscrew (5/8" x 5-1/2" NC); S/L Jam Nut	(2)
5-11	00392300	RS Caster Wheel	(2)
Form RSP1B		All specifications subject to change without notice.	10/30/2003

